






FAG520

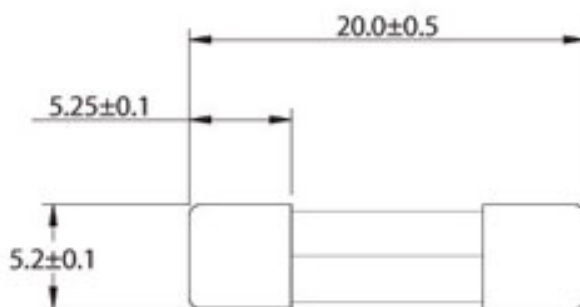


FAG520-P

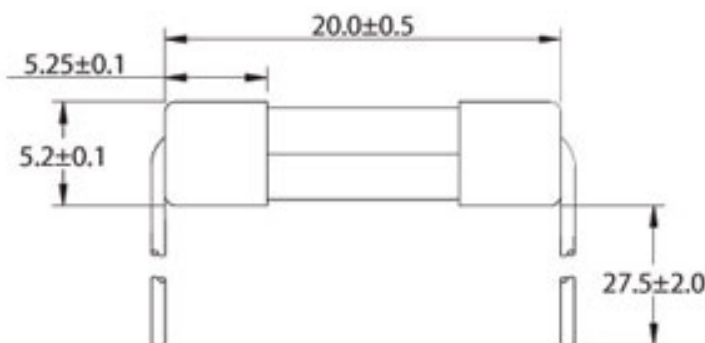

FAG520-PA

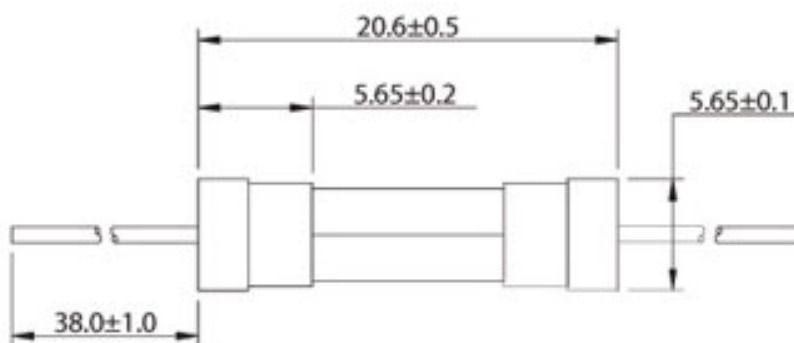

FAG520-PR

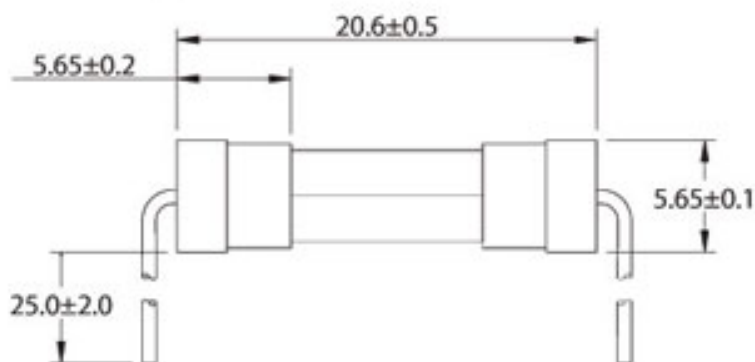

Construction: Glass Tube

Rated current: 0.05A-30A

Rated Voltage: 125V/250V

Approvals: UL, CSA, JIS

From: 0.1-8A 125V/250V, 10A

Electrical Characteristic

Rated Current	1 In	1.35 In	2 In
In	Min.	Max.	Max.
0.05A-30A	4 h	3600 S	120 S



**FAG520 Series**  
Fast Acting, Glass Tube

Part Number	Rated Current	Breaking Capacity	Rated Voltage
FAG520-0.050-__	50mA	35A @ 250V/AC  10KA @ 125V/AC	125V/250V
FAG520-0.063-__	63mA		
FAG520-0.080-__	80mA		
FAG520-0.100-__	100mA		
FAG520-0.125-__	125mA		
FAG520-0.160-__	160Ma		
FAG520-0.200-__	200mA		
FAG520-0.250-__	250mA		
FAG520-0.300-__	300mA		
FAG520-0.315-__	315mA		
FAG520-0.400-__	400mA		
FAG520-0.500-__	500mA		
FAG520-0.600-__	600mA		
FAG520-0.630-__	630mA		
FAG520-0.700-__	700mA		
FAG520-0.800-__	800mA		
FAG520-001-__	1A		
FAG520-1.25-__	1.25A	100A @ 250V/AC  10KA @ 125V/AC	125V/250V
FAG520-1.50-__	1.5A		
FAG520-1.60-__	1.6A		
FAG520-002-__	2A		
FAG520-2.50-__	2.5A		
FAG520-003-__	3A		
FAG520-3.15-__	3.15A		
FAG520-3.50-__	3.5A		
FAG520-004-__	4A	200A @ 250V/AC  10KA @ 125V/AC	125V/250V
FAG520-005-__	5A		
FAG520-006-__	6A		
FAG520-6.30-__	6.3A		
FAG520-007-__	7A		
FAG520-008-__	8A		
FAG520-010-__	10A		
FAG520-012-__	12A	10KA @ 125V/AC	125V
FAG520-013-__	13A		
FAG520-015-__	15A		
FAG520-016-__	16A		
FAG520-020-__	20A		
FAG520-025-__	25A		
FAG520-030-__	30A		

└─ Style Options: Nil = Axial w/o Leads  
           P = Radial Straight Leads  
           PA = Axial with Leads  
           PR = Radial Bent Leads  
           ex. FAG520-3.15-PR