






QAG520

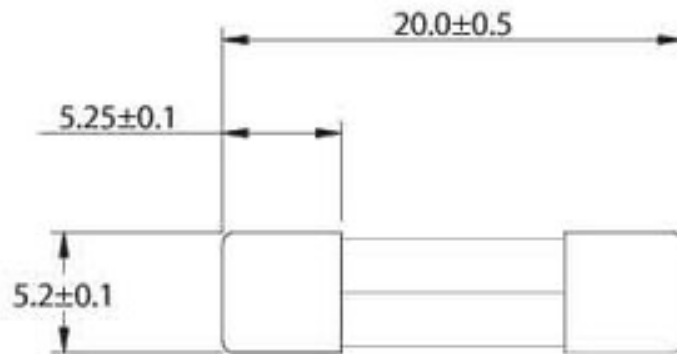

QAG520-PA

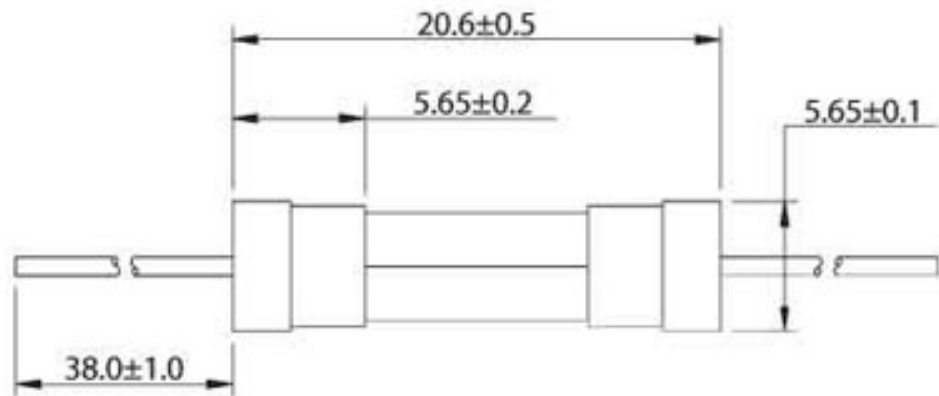

QAG520-PR

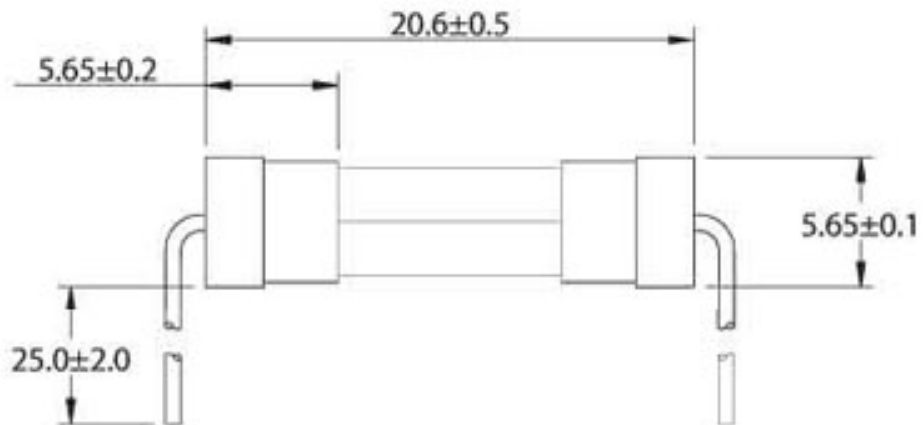

Construction:Glass Tube

Rated current:0.1A-16A

Rated Voltage:250V

Standard:IEC-127-2/2

Electrical Characteristic

In	1.5 In		2.1 In		2.75 In		4 In		10 In
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Max.
32mA-100mA	1h	30min	10ms	500 ms	3ms	100 ms	20ms		
125mA-6.3A	1h	30min	0.05 s	2s	10ms	300 ms	20ms		



QAG520 Series
Quick Acting, Glass Tube

Part Number	Rated Current	Breaking Capacity	Rated Voltage
QAG520-0.100-__	100mA	35A @ 250V/AC 10KA @ 125V/AC	125V/250V
QAG520-0.125-__	125mA		
QAG520-0.160-__	160mA		
QAG520-0.200-__	200mA		
QAG520-0.250-__	250mA		
QAG520-0.300-__	300mA		
QAG520-0.315-__	315mA		
QAG520-0.400-__	400mA		
QAG520-0.500-__	500mA		
QAG520-0.600-__	600mA		
QAG520-0.630-__	630mA		
QAG520-0.700-__	700mA		
QAG520-0.800-__	800mA		
QAG520-001-__	1A		
QAG520-1.25-__	1.25A	100A @ 250V/AC 10KA @ 125V/AC	125V/250V
QAG520-1.50-__	1.5A		
QAG520-1.60-__	1.6A		
QAG520-002-__	2A		
QAG520-2.50-__	2.5A		
QAG520-003-__	3A		
QAG520-3.15-__	3.15A		
QAG520-3.50-__	3.5A		
QAG520-004-__	4A	200A @ 250V/AC 10KA @ 125V/AC	125V/250V
QAG520-005-__	5A		
QAG520-006-__	6A		
QAG520-6.30-__	6.3A		
QAG520-007-__	7A		
QAG520-008-__	8A		
QAG520-010-__	10A	1000A @ 32V/AC	32V
QAG520-012-__	12A		
QAG520-013-__	13A		
QAG520-015-__	15A		
QAG520-016-__	16A		

└── Style Options: Nil = Axial w/o Leads
 PA = Axial with Leads
 PR = Radial Bent Leads
ex. QAG520-3.15-PR