







QAG635

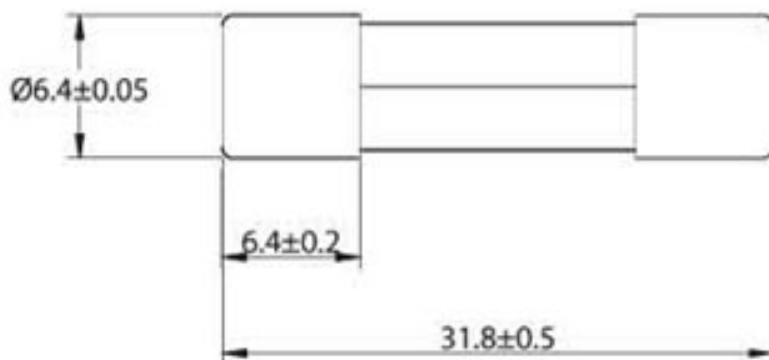

QAG635-PA

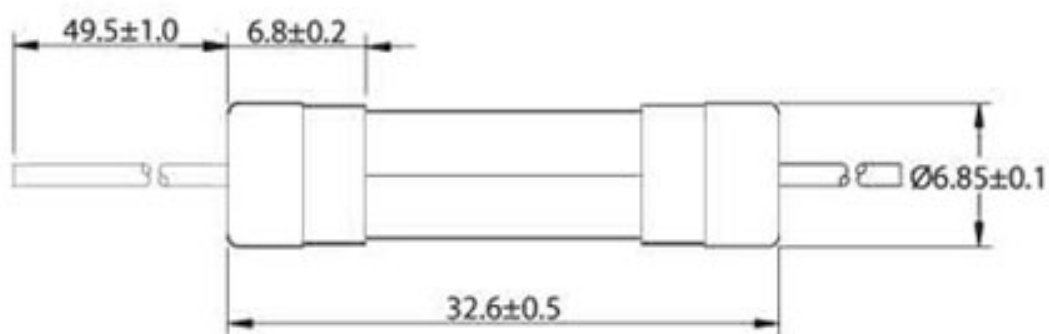

QAG635-PR

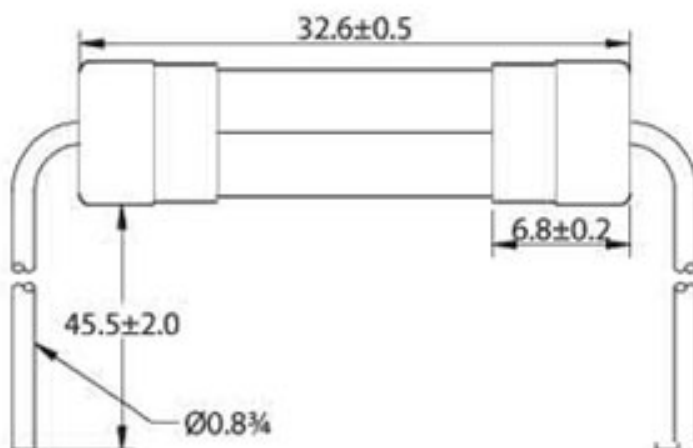

Construction: Glass Tube
 Rated current: 1A-16A
 Rated Voltage: 50V
 Standard: IEC-127-2/4

Electrical Characteristic

| In | 1.5 In | 2.1 In | 2.75 In | | 4 In | | 10 In |
|------------|--------|--------|---------|---------|------|--------|-------|
| | | 2.0 In | | | | | |
| | Min. | Max. | Min. | Max. | Min. | Max. | Max. |
| 50mA-100mA | 1h | 20s | 2ms | 200 ms | 1ms | 30 ms | 5ms |
| 125mA-10A | 1h | 20s | 20 ms | 1500 ms | 8ms | 400 ms | 80ms |



QAG635 Series
Quick Acting, Glass Tube

| Part Number | Rated Current | Breaking Capacity | Rated Voltage | | |
|-----------------|---------------|--------------------------------------|---------------|--------------------------------------|-----------|
| QAG635-0.100-__ | 100mA | 35A @ 250V/AC 10KA @ 250V/AC | 125V/250V | | |
| QAG635-0.125-__ | 125mA | | | | |
| QAG635-0.160-__ | 160mA | | | | |
| QAG635-0.200-__ | 200mA | | | | |
| QAG635-0.250-__ | 250mA | | | | |
| QAG635-0.300-__ | 300mA | | | | |
| QAG635-0.315-__ | 315mA | | | | |
| QAG635-0.400-__ | 400mA | | | | |
| QAG635-0.500-__ | 500mA | | | | |
| QAG635-0.600-__ | 600mA | | | | |
| QAG635-0.630-__ | 630mA | | | | |
| QAG635-0.700-__ | 700mA | | | | |
| QAG635-0.800-__ | 800mA | | | | |
| QAG635-001-__ | 1A | | | 100A @ 250V/AC 10KA @ 125V/AC | 125V/250V |
| QAG635-1.25-__ | 1.25A | | | | |
| QAG635-1.50-__ | 1.5A | | | | |
| QAG635-1.60-__ | 1.6A | | | | |
| QAG635-002-__ | 2A | | | | |
| QAG635-2.50-__ | 2.5A | | | | |
| QAG635-003-__ | 3A | | | | |
| QAG635-3.15-__ | 3.15A | 200A @ 250V/AC 10KA @ 125V/AC | 125V/250V | | |
| QAG635-004-__ | 4A | | | | |
| QAG635-005-__ | 5A | | | | |
| QAG635-006-__ | 6A | | | | |
| QAG635-6.30-__ | 6.3A | | | | |
| QAG635-007-__ | 7A | | | | |
| QAG635-008-__ | 8A | | | | |
| QAG635-010-__ | 10A | | | | |
| QAG635-012-__ | 12A | | | 1000A @ 32V/AC | 32V |
| QAG635-013-__ | 13A | | | | |
| QAG635-015-__ | 15A | | | | |
| QAG635-016-__ | 16A | | | | |

└─ Style Options: Nil = Axial w/o Leads
 PA = Axial with Leads
 PR = Radial Bent Leads
 ex. QAG635-3.15-PR