






TDC520

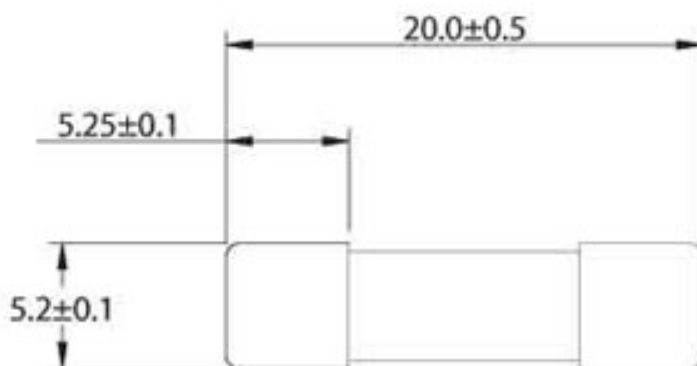

TDC520-PA

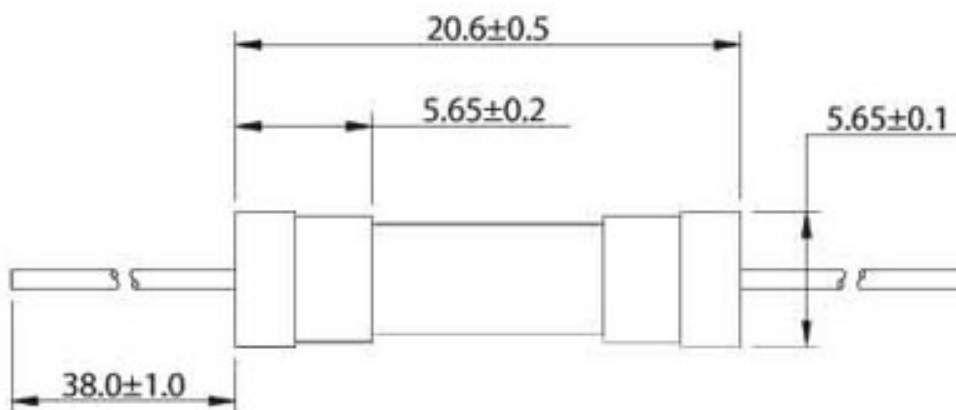

TDC520-PR

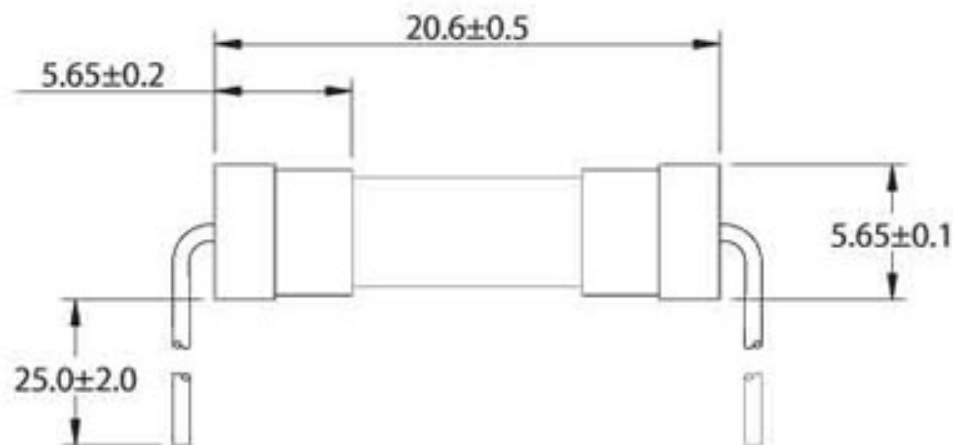

Construction: Ceramic Tube Electrical Characteristic

Rated current: 0.1A-16A

Rated Voltage: 250V

Standard: IEC-127-2/5

In	1.5 In		2.1 In		2.75 In		4 In		10 In	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1A-3.15A	1h	30min	1s	80s	95ms	5s	10ms	100ms		
3.15A-6.3A	1h	30min	1s	80s	0.15s	5s	20ms	100ms		



TDC520 Series
Time Delay, Ceramic Tube

Part Number	Rated Current	Breaking Capacity	Rated Voltage
TDC520-0.100-__	100mA	35A @ 250V/AC 10,000A @ 125V/AC	125V/250V
TDC520-0.125-__	125mA		
TDC520-0.160-__	160mA		
TDC520-0.200-__	200mA		
TDC520-0.250-__	250mA		
TDC520-0.300-__	300mA		
TDC520-0.315-__	315mA		
TDC520-0.400-__	400mA		
TDC520-0.500-__	500mA		
TDC520-0.600-__	600mA		
TDC520-0.630-__	630mA		
TDC520-0.700-__	700mA		
TDC520-0.800-__	800mA		
TDC520-001-__	1A		
TDC520-1.25-__	1.25A	100A @ 250V/AC 10,000A @ 125V/AC	125V/250V
TDC520-1.50-__	1.5A		
TDC520-1.60-__	1.6A		
TDC520-002-__	2A		
TDC520-2.50-__	2.5A		
TDC520-003-__	3A		
TDC520-3.15-__	3.15A		
TDC520-3.50-__	3.5A		
TDC520-004-__	4A	200A @ 250V/AC 10,000A @ 125V/AC	125V
TDC520-005-__	5A		
TDC520-006-__	6A		
TDC520-6.30-__	6.3A		
TDC520-007-__	7A		
TDC520-008-__	8A		
TDC520-010-__	10A		
TDC520-012-__	12A		
TDC520-013-__	13A	1000A @ 125V/AC	125V
TDC520-015-__	15A		
TDC520-016-__	16A	1000A @ 32V/AC	32V
TDC520-020-__	20A		

└─ Style Options: Nil = Axial w/o Leads
 PA = Axial with Leads
 PR = Radial Bent Leads
 ex. *TDC520-3.15-PR*