






TDC635

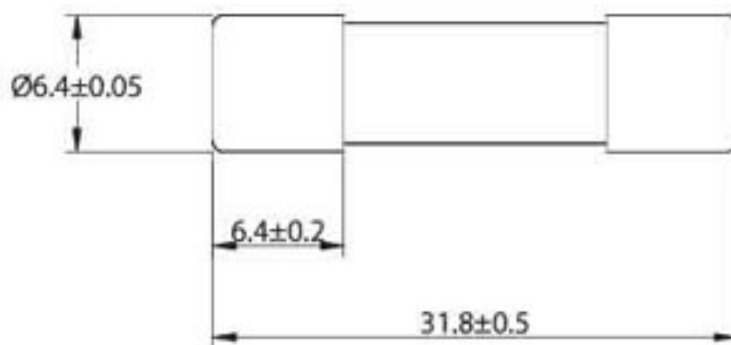

TDC635-PA

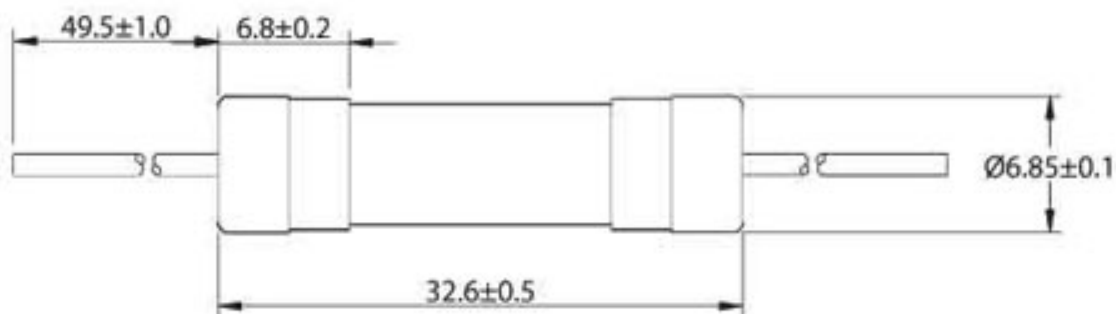

TDC635-PR

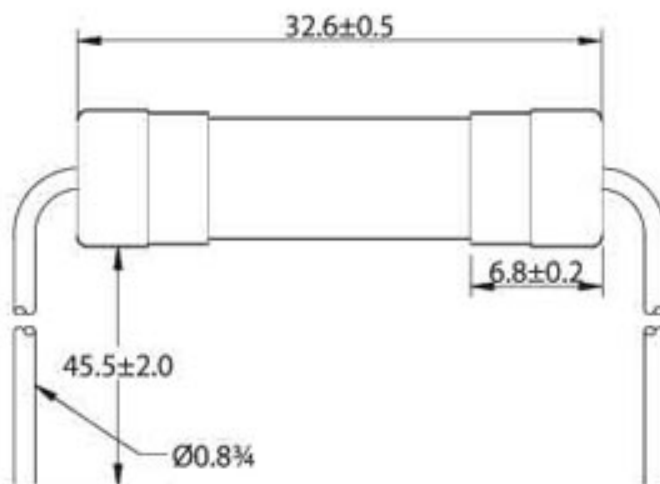

Construction: Ceramic Tube
 Rated current: 0.1A-16A
 Rated Voltage: 250V

Electrical Characteristic

| In | 1.5 In | | 2.1 In | | 2.75 In | | 4 In | | 10 In | |
|------------|--------|-------|--------|------|---------|------|------|-------|-------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| 32mA-100mA | 1h | 60min | 2s | 40s | 150ms | 4s | 5ms | 100ms | | |
| 125mA-6.3A | 1h | 60min | 3s | 50s | 0.4s | 4s | 15ms | 200ms | | |



TDC635 Series
Time Delay, Ceramic Tube

| Part Number | Rated Current | Breaking Capacity | Rated Voltage |
|-----------------|---------------|--|---------------|
| TDC635-0.100-__ | 100mA | 10,000A @ 125V/AC 35A @ 250V/AC | 125V/250V |
| TDC635-0.125-__ | 125mA | | |
| TDC635-0.160-__ | 160mA | | |
| TDC635-0.200-__ | 200mA | | |
| TDC635-0.250-__ | 250mA | | |
| TDC635-0.300-__ | 300mA | | |
| TDC635-0.315-__ | 315mA | | |
| TDC635-0.400-__ | 400mA | | |
| TDC635-0.500-__ | 500mA | | |
| TDC635-0.600-__ | 600mA | | |
| TDC635-0.630-__ | 630mA | | |
| TDC635-0.700-__ | 700mA | | |
| TDC635-0.800-__ | 800mA | | |
| TDC635-001-__ | 1A | | |
| TDC635-1.25-__ | 1.25A | | |
| TDC635-1.50-__ | 1.5A | | |
| TDC635-1.60-__ | 1.6A | | |
| TDC635-002-__ | 2A | | |
| TDC635-2.50-__ | 2.5A | | |
| TDC635-003-__ | 3A | | |
| TDC635-3.15-__ | 3.15A | | |
| TDC635-004-__ | 4A | 200A @ 250V/AC 10KA @ 125V/AC | 125V |
| TDC635-005-__ | 5A | | |
| TDC635-006-__ | 6A | | |
| TDC635-6.30-__ | 6.3A | | |
| TDC635-007-__ | 7A | | |
| TDC635-008-__ | 8A | | |
| TDC635-010-__ | 10A | 1000A @ 125V/AC | 125V |
| TDC635-012-__ | 12A | | |
| TDC635-013-__ | 13A | | |
| TDC635-015-__ | 15A | | |
| TDC635-016-__ | 16A | 1000A @ 32V/AC | 32V |
| TDC635-020-__ | 20A | | |

└─ Style Options: Nil = Axial w/o Leads
 PA = Axial with Leads
 PR = Radial Bent Leads
 ex. TDC635-3.15-PR